



GB1-H-8M-G-R.AVY.ORG

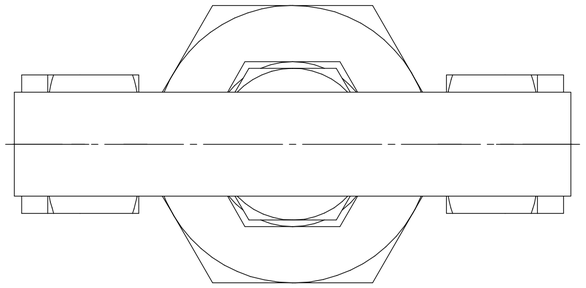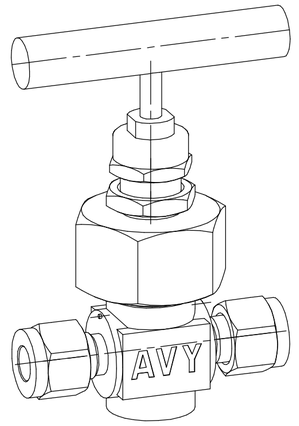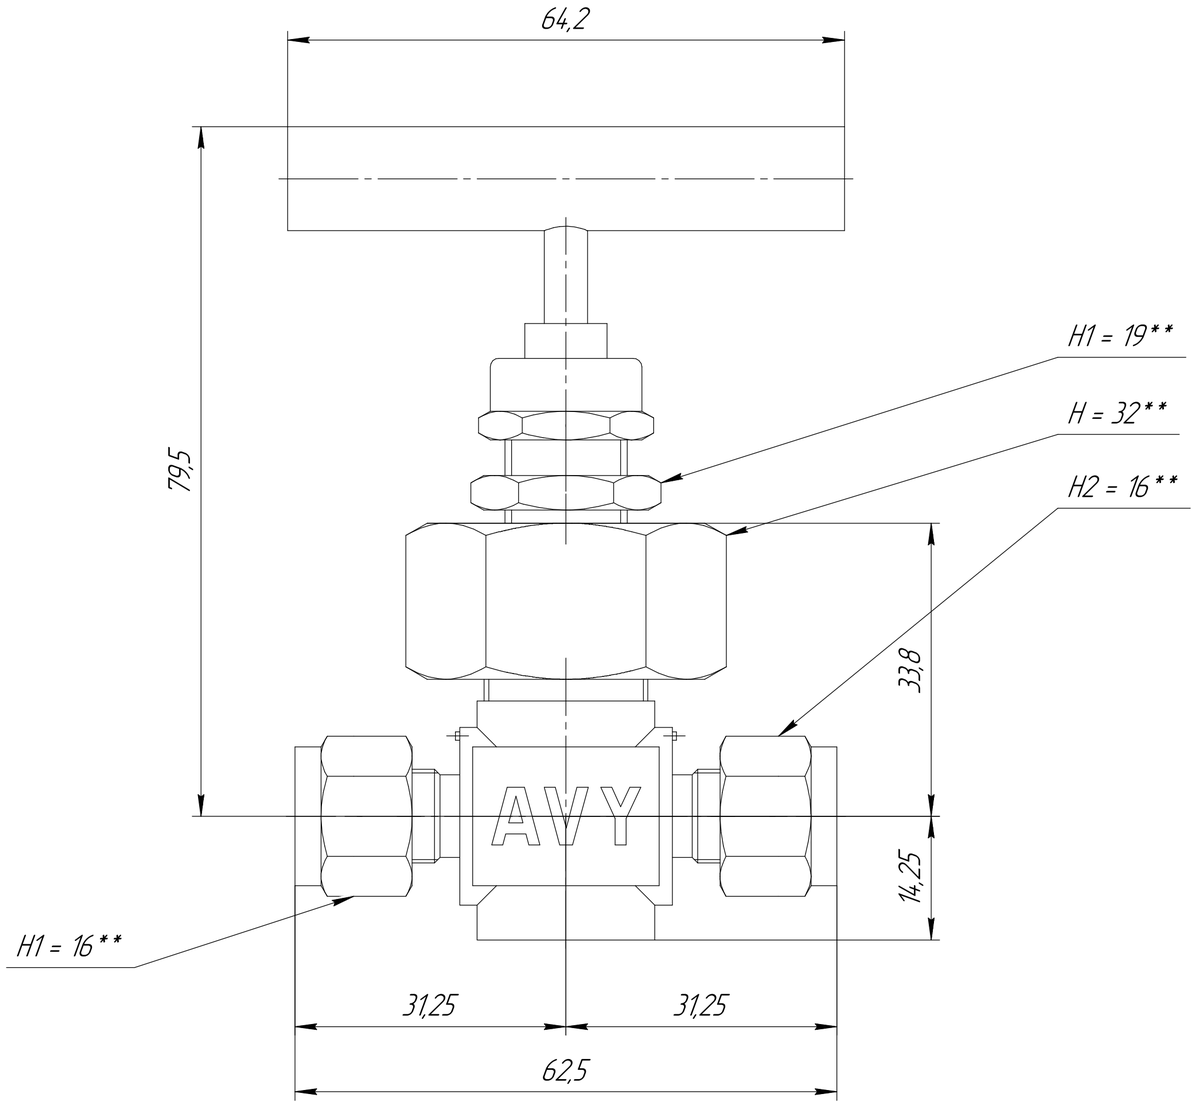

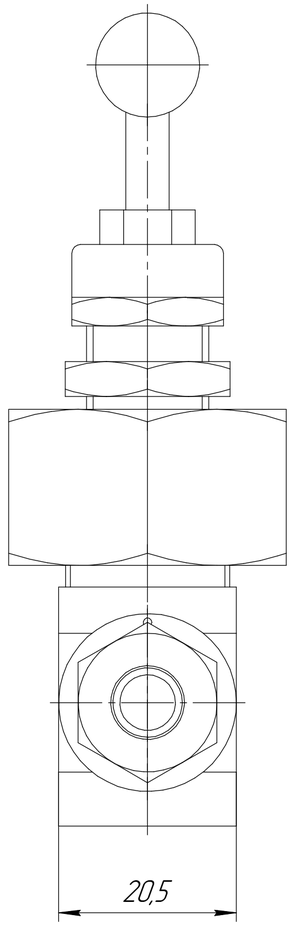


1. *This size may depend on the degree of tightenining
2. ** Hex size
3 Pressure rating 414bar (T = 21 °C)
4 Temperature rating from -54 to 648°C
5 Needle fine adjustment

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| | | | | | GB1-H-8M-G-R.AVY.ORG | | | |
| Ch. | Sheet | № doc. | Sign. | Date | GB Series Needle Valve | Char. | Weight | Scale 2:1 |
| Develop. | | | | | | | | |
| Checked | | | | | | Sheet | Sheets 1 | |
| Tech. contr. | | | | | | | | |
| Reg. contr. | | | | | HY-LOK CORPORATION | | | |
| Approv. | | | | | | | | |

Copied

Format A2

First mention

Reference №

Sign. and date

Inv. № copy

Exch. inv. №

Sign. and date

Inv. № orig.